

# Programmable controller source output relay isolation socket-type N/O contact output module

**New relay terminal module is now available for the programmable controller source output modules.**


New Release



## Features

- The new relay terminal module can be connected to the programmable controller source output modules.
- The new relay terminal module has sockets, so existing modules can be replaced on a per point basis, allowing easy maintenance.
- The new relay terminal module adopts the independent common method, so transistors and SSR output modules (sold separately) can be replaced with existing modules and used together.
- The on/off status and output status of the programmable controller can be checked with LED indication.
- The new relay terminal module resists temperatures up to -20°C.


## Functions

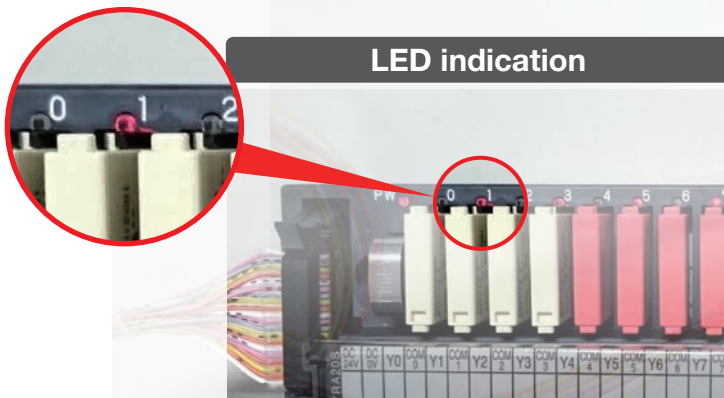

LED indication

The on/off status and output status of the programmable controller can be checked with LED indication!


Relay module replaceable

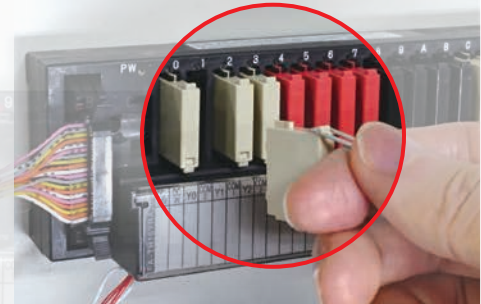


Life-expired relays can be replaced on a per point basis, allowing easy maintenance!

## Example of use

(MELSEC iQ-R series)

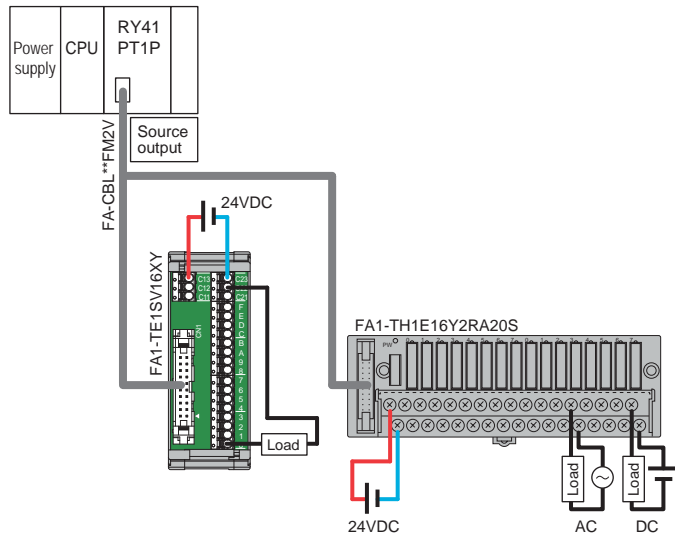


(MELSEC iQ-F series)

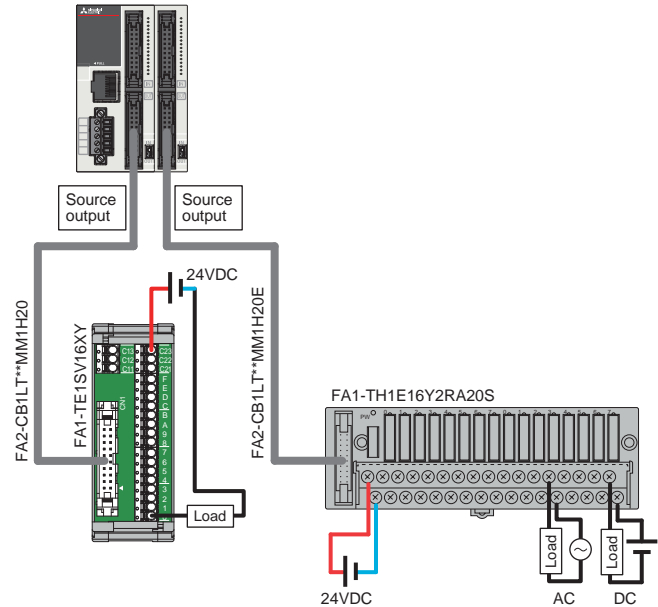


## Performance specifications

Item	Model	Specifications
		FA1-TH1E16Y2RA20S
Number of points		16 points
Rated switching voltage/current		Voltage: 24VDC, 100 to 240VAC (+10%, -15%), 50/60Hz Current: 2A/point (resistance load, COSΦ=1)
Minimum switching load		5VDC, 1mA
Terminal screw		M3 spring-up screw, 7.62 mm-pitch
Wiring method for common		Independent common
Module replacement count		50 times
Module mixing		Supported
Electrical life		100000 times or more at rated switching voltage/current
Mechanical life		20 million times or more
Maximum switching frequency		1800 times/hour (ON for 1 second or longer, OFF for 1 second or longer)
Response time	OFF → ON	10ms or less (excluding programmable controller response time)
	ON → OFF	12ms or less (excluding programmable controller response time)

## External dimensions

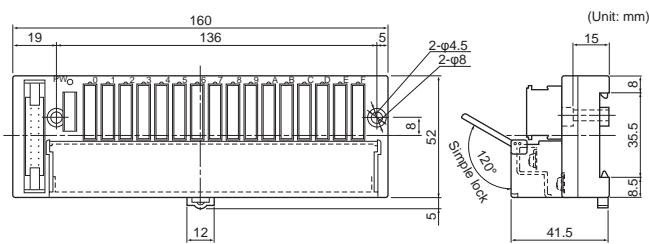


## Wiring diagram

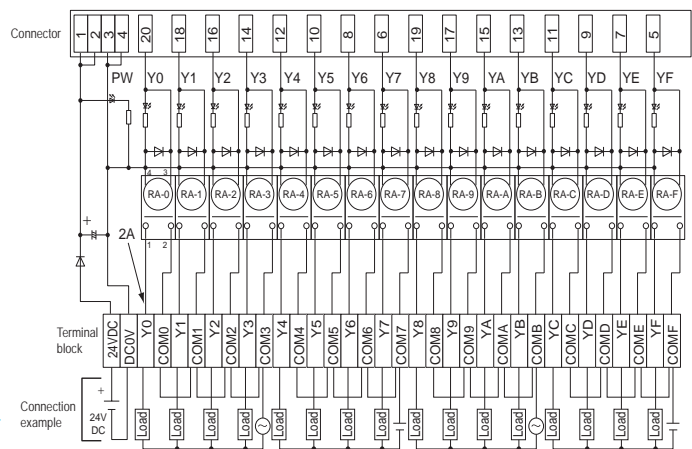


## Module installation direction

Horizontal installation



Vertical installation



Note:  
Do not install the module in any direction other than the above.

## Connectable programmable controllers

### ●FA1-TH1E16Y2RA20S


Programmable controller type	Input/Output	Programmable controller module model (Note 1)		Connection cable model
MELSEC iQ-R series	Output	RY41PT1P, RY42PT1P		FA-CBL**FM2V(Note 2), FA-CBL**FM2LV(Note 2)
		RY40PT5P, RY40PT5B		FA-CBL**M20, FA-CBL**YM20, FA-CBL**TMV20
MELSEC-Q series	Output	QY81P		FA-CBL**DM2FY(Note 2)
		QY82P		FA-CBL**FM2V(Note 2), FA-CBL**FM2LV(Note 2)
		QY80P		FA-CBL**M20, FA-CBL**YM20, FA-CBL**TMV20
MELSEC-L series	Output	LY41PT1P, LY42PT1P		FA-CBL**FM2V(Note 2), FA-CBL**FM2LV(Note 2)
	Combined	LH42C4PT1P	Output	FA-CBL**FM2V(Note 2), FA-CBL**FM2LV(Note 2)
MELSEC iQ-F series	Combined	FX5UC-32MT/DSS, FX5UC-64MT/DSS, FX5UC-96MT/DSS, FX5-C32ET/DSS		FA2-CB1LT**MM1H20E
	Output	FX5-C16EYT/DSS, FX5-C32EYT/DSS		FA2-CB1LT**MM1H20E

Note 1: For use with 24VDC only.


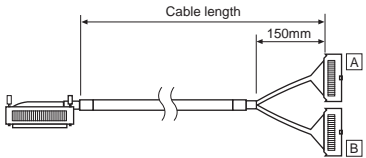

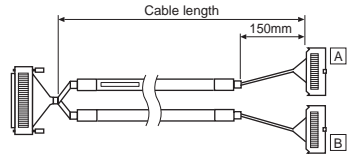







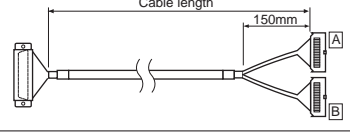


Note 2: Use the same power supply for the two terminal modules to be connected.

## Model list

### ●Module

Product	Shape	Model	Number of points	External connection	Remarks
Programmable controller source output relay isolation socket-type N/O contact output module		FA1-TH1E16Y2RA20S	16 points	Independent common	<ul style="list-style-type: none"> <li>This relay terminal module converts output signals from the MELSEC transistor source output module into 16-point N/O contact relay output terminal block (2A/point) outputs.</li> <li>This relay terminal module has sockets, so relays can be replaced on a per point basis.</li> </ul>

### ●Cable

Product	Shape	Model	Number of points	Remarks
Vertical branch cable (split at the end) for MELSEC-dedicated I/O module		FA-CBL06FM2V	0.6m	
		FA-CBL10FM2V	1.0m	
		FA-CBL15FM2V	1.5m	
		FA-CBL20FM2V	2.0m	
		FA-CBL30FM2V	3.0m	
		FA-CBL50FM2V	5.0m	
		FA-CBL100FM2V	10.0m	
Vertical branch cable (split at the base) for MELSEC-dedicated I/O module		FA-CBL06FM2LV	0.6m	
		FA-CBL10FM2LV	1.0m	
		FA-CBL20FM2LV	2.0m	
		FA-CBL30FM2LV	3.0m	
		FA-CBL50FM2LV	5.0m	
		FA-CBL100FM2LV	10.0m	
Connection cable (discrete cable) for MELSEC terminal block I/O		FA-CBL06M20	0.6m	
		FA-CBL 10M20	1.0m	
		FA-CBL20M20	2.0m	
Connection cable (with Y-shaped solderless terminal) for MELSEC terminal block I/O		FA-CBL10YM20	1.0m	
		FA-CBL20YM20	2.0m	
		FA-CBL30YM20	3.0m	
		FA-CBL50YM20	5.0m	
Connection cable (with MELSEC-Q terminal block) for MELSEC terminal block I/O		FA-CBL06TMV20	0.6m	
		FA-CBL10TMV20	1.0m	
		FA-CBL20TMV20	2.0m	
		FA-CBL30TMV20	3.0m	
Horizontal branch cable (D-Sub connector type) for MELSEC-dedicated source output module		FA-CBL20DM2FY	2.0m	
16-point I/O module programmable controller connection cable withstanding -20°C (crossover cable)		FA2-CB1LT10MM1H20E	1.0m	
		FA2-CB1LT20MM1H20E	2.0m	
		FA2-CB1LT30MM1H20E	3.0m	



●Product list

Product	Model	Remarks		
Replacement module (Note 1)	FA-NYP24WK4	N/O contact relay (quantity: 4, color: beige)		
	FA-NYBP24WK4	NC contact relay (quantity: 4, color: sky blue)		
	FA-SN24A01FS4	Triac (quantity: 4, color: black)		
	FA-SN24D01HZS4	Transistor (quantity: 4, color: red)		
	FA-SN00SS4	Signal pass-through module (quantity: 4, color: green)		
Short-circuit bar	FA-LYCA024VSK4	CO (change-over) contact relay (quantity: 4, color: white)		
	FA-BAR20P-20	M3 screw, 7.62-mm pitch, 20-pin short-circuit bar (quantity: 20, tin-plated brass, rated voltage and current: 300VAC/VDC and 10A)		
	FA-BAR20PG-20	M3 screw, 7.62-mm pitch, 20-pin insulated short-circuit bar (quantity: 20, tin-plated brass, rated voltage and current: 300VAC/VDC and 10A)		
	FA-BAR18PL-20	M3.5 screw, 8-mm pitch, 18-pin short-circuit bar (quantity: 20, tin-plated brass, rated voltage and current: 300VAC/VDC and 10A)		
Programmable controller sink output relay isolation type N/O contact output module	FA-BAR18PGL-20	M3.5 screw, 8-mm pitch, 18-pin insulated short-circuit bar (quantity: 20, tin-plated brass, rated voltage and current: 300VAC/VDC and 10A)		
	FA-TH16YRA11	2A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YRA21	2A/point, 8A/common	16 points/common, 2-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YRA20	2A/point	16-point independent common	M3 screw, 7.62-mm pitch
Programmable controller sink output relay isolation socket-type N/O contact output module	FA-TH16YRA11S	2A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YRA21S	2A/point, 8A/common	16 points/common, 2-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YRA20S	2A/point	16-point independent common	M3 screw, 7.62-mm pitch
	FA-TH16YRA20SL	2A/point	16-point independent common	M3.5 screw, 8-mm pitch
Programmable controller sink output relay isolation socket-type NC contact output module	FA-TH16YRAB20SL	2A/point	16-point independent common	M3.5 screw, 8-mm pitch
Programmable controller sink output relay isolation socket-type CO contact output module	FA-TH16YRAC20S	6A/point	16-point independent common	M3 screw, 7.62-mm pitch
Programmable controller sink output photocoupler isolation socket-type triac output module	FA-TH16YSR11S	1A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YSR21S	1A/point, 8A/common	16 points/common, 2-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YSR20S	1A/point	16-point independent common	M3 screw, 7.62-mm pitch
Programmable controller sink output photocoupler isolation socket-type transistor sink output module	FA-TH16YTL11S	1A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
	FA-TH16YTL21S	1A/point, 8A/common	16 points/common, 2-wire type	M3 screw, 7.62-mm pitch
Programmable controller sink output photocoupler isolation socket-type transistor source output module	FA-TH16YTH11S	1A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
Programmable controller sink output photocoupler isolation socket-type transistor sink/source common output module	FA-TH16YTR20S	1A/point	16-point independent common	M3 screw, 7.62-mm pitch
Programmable controller sink output photocoupler isolation type transistor sink/source common output module	FA-TH16Y2TR20	2A/point	16-point independent common	M3 screw, 7.62-mm pitch
Programmable controller source output photocoupler isolation socket-type transistor source output module	FA-THE16YTH11S	1A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
Programmable controller source output photocoupler isolation socket-type transistor sink/source common output module	FA-THE16YTR20S	1A/point	16-point independent common	M3 screw, 7.62-mm pitch
FX series programmable controller sink output relay isolation type N/O contact output module	FA-FXTH16YRA20	2A/point	16-point independent common	M3 screw, 7.62-mm pitch
FX series programmable controller sink output relay isolation socket-type N/O contact output module	FA-FXTH16YRA11S	2A/point, 8A/common	16 points/common, 1-wire type	M3 screw, 7.62-mm pitch
	FA-FXTH16YRA20S	2A/point	16-point independent common	M3 screw, 7.62-mm pitch

Note 1: UL certification for the replacement modules has not been acquired.

The company names and product names mentioned in this document are either registered trademarks or trademarks of their respective companies.

## MITSUBISHI ELECTRIC ENGINEERING COMPANY LIMITED

[NAGOYA ENGINEERING OFFICE] 139, Shimoyashikicho, Shimoyashiki, Kasugai, Aichi, 486-0906, Japan

### Precautions for Choosing the Products

This publication explains the typical features and functions of the products herein and does not provide restrictions or other information related to usage and module combinations. Before using the products, always read the product user manuals.

Mitsubishi Electric Engineering will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric Engineering: machine damage or lost profits caused by faults in the Mitsubishi Electric Engineering products; damage, secondary damage, accident compensation caused by special factors unpredictable by Mitsubishi Electric Engineering; damages to products other than Mitsubishi Electric Engineering products; and to other duties.

### ⚠ For safe use

- To use the products given in this publication properly, always read the relevant manuals before beginning operation.
- The products have been manufactured as general-purpose parts for general industries, and are not designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger-carrying vehicles, consult with Mitsubishi Electric Engineering.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

⚠ Before using the products, ensure the safety in case of failure. We shall not bear any responsibility for consequential damages caused by failure of the product.  
Please read Safety Precaution in the FA Goods General Catalog carefully, and pay full attention to safety to handle the products correctly.

New publication, effective Jul. 2019  
Specifications are subject to change without notice.