
MITSUBISHI ELECTRIC ENGINEERING


FAgoods

Digest edition

General Catalog

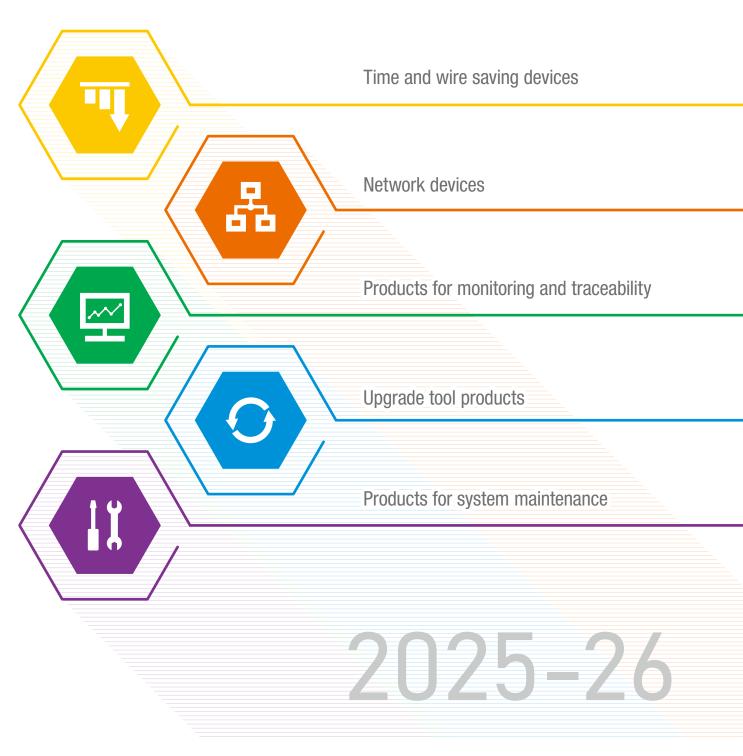

MITSUBISHI ELECTRIC ENGINEERING COMPANY LIMITED

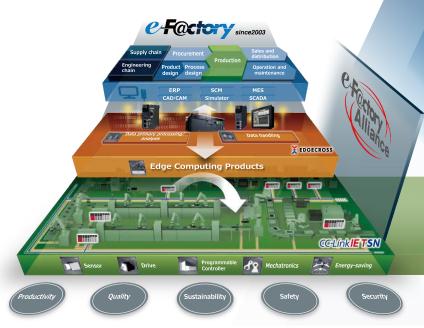

Source: Mitsubishi Electric Corporation

e-F@ctory


Manufacturing can be optimized by analyzing and utilizing the data collected from various devices and equipment connected with IIoT in developing, manufacturing, and logistics processes.

Our high technical capability and quality and technique to link FA devices and IT system will offer solutions for next-generation manufacturing such as mass customization, preventive maintenance, and traceability.


Fields of manufacturing are changing and to be changed

Labor-saving will support future manufacturing as the number of workers is decreasing today.

Our products provide five methods for control panel solutions according to fields of manufacturing.

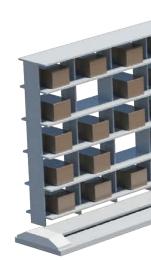



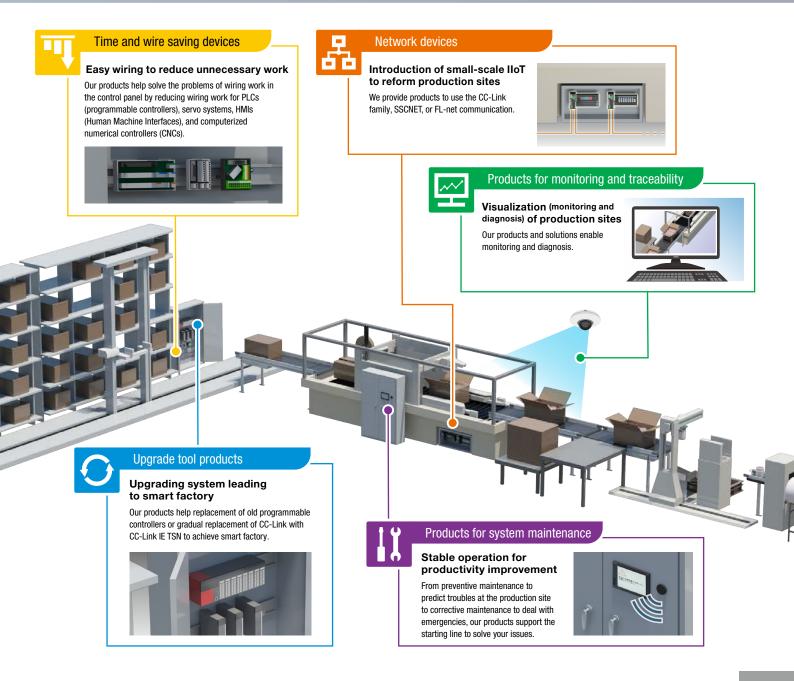


Time and wire saving devices

CHAPTER 01

Easy wiring to reduce unnecessary work


Our products help solve the problems of wiring work in the control panel by reducing wiring work for Mitsubishi Electric programmable controllers, servo systems, HMIs (GOTs), and computerized numerical controllers (CNCs). Our products are also available for non-Mitsubishi PLCs.

Easy push-in connection

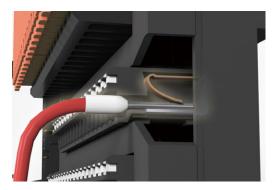


Push-in connection is available for the spring clamp terminal block, reducing cost and time for wiring and maintenance.

Customization of output modules

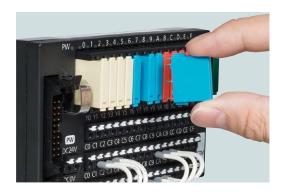

Cost and time for wiring and initial/ maintenance cost can be reduced by combining output modules on an installation base unit.


Simple wiring

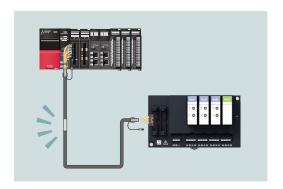

One-touch connection using a dedicated cable reduces cost and time for wiring.


Three merits of no screw connection

Easy wiring



- · Significant reduction in cost and time for screw-tightening
- · No need for a screwdriver due to push-in connection
- Reduction in cost and time for wiremodification (stranded/solid wire)

Stable connection



No risks arising from screw-loosening due to vibration or long-term use

Less maintenance



No need for retightening work at delivery or inspection of the control panel or devices

Optimum device connection with one programmable controller module

Digital signal converter for input signals Digital signal converter for output signals Analog signal converter for output signals Analog signal converter for input signals

Spring clamp type (4/8/16-point)

Screw type (16-point)

Spring clamp type (4/8/16-point)

Screw type (16-point)

Spring clamp type (4/8-channel)

Output

Screw type (4/8-channel) Spring clamp type (4/8-channel)

Screw type (4/8-channel)





Devices

Input Output

Switch, limit switch, proximity sensor, etc.


Magnetic starter, indication lamp, etc.

Devices

Temperature/humidity/vibration/flow/pressure sensor, laser distance sensor, etc

Solenoid valve, recorder, etc.

Easy wiring for programmable controller, servo, and HMI with one cable

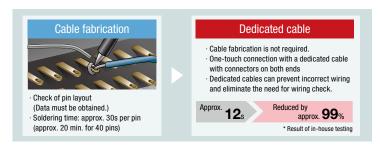


Using dedicated cables reduces cost and time for prior check of pin layout and wiring. Easy wiring leads to control panel solutions.




Network connection makes wiring easier between the control panel and devices. (For details, refer to pages 18 and 19.)

Configuration diagram

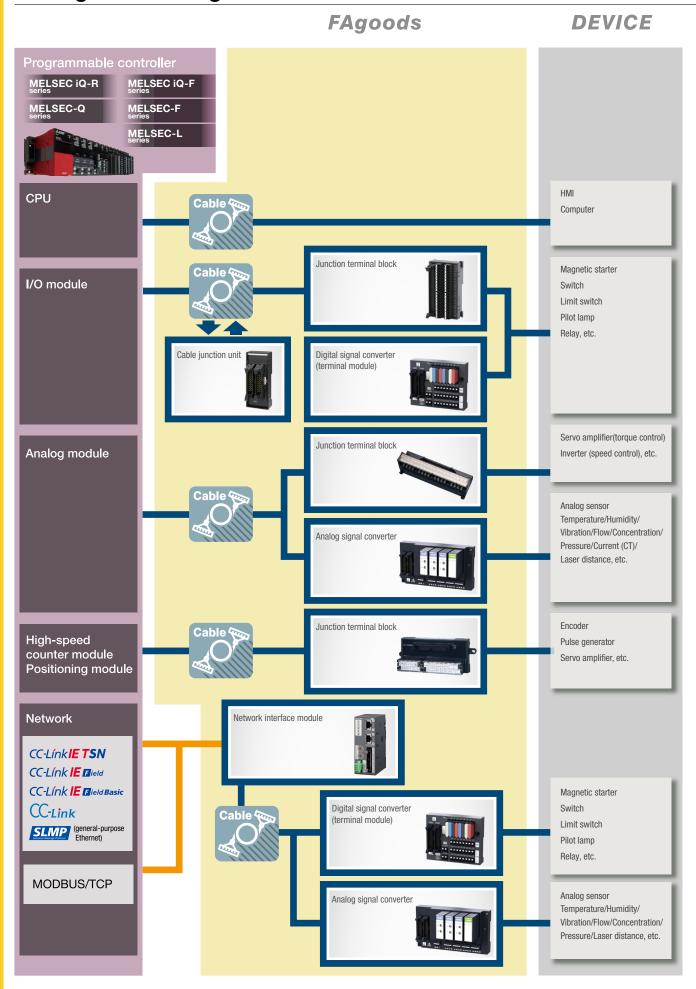



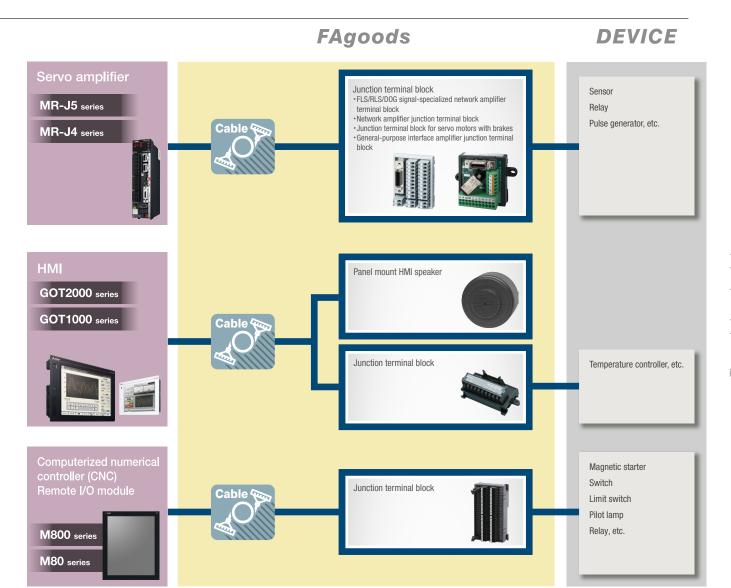

Easy selection

The selection tool on our website helps select the optimum terminal blocks and cables for Mitsubishi Electric programmable controllers and HMIs (GOTs).

The connectable models are displayed by entering/selecting the model name of the programmable controller or HMI (GOT).




www.mitsubishielectric engineering.com/sales/fa/mee fan/



From our website

(www.mitsubishielectricengineering.com/sales/fa/meefan/)

Select "Selection Tool for Time and Wire Saving Devices for Programmable Controllers" from the opening page of MEEFAN.

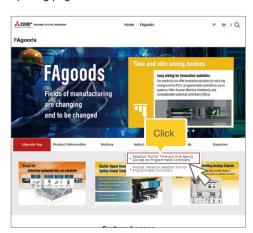


Click the [FAgoods product selection tool] button under "Startup method".



The following window appears.

Enter the model name of the MELSEC series module in the "Model name" field. (Alternatively, select the model from the drop-down list.)


In the "FA Goods type" field, select the product and its specifications from the lists. The connectable terminal blocks and connection cables between the programmable controller and the terminal block are also displayed.

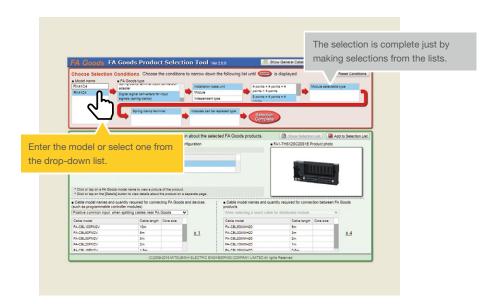


Go to the Mitsubishi Electric FA website. (www.mitsubishielectric.com/fa/)

FA Integrated Selection Tool enables you to select multiple models of modules such as MELSEC series, remote I/Os, AC servos (MELSERVO), and HMIs (GOTs) and select equipment/entire system.

Go to the opening page of the Mitsubishi Electric FA website and click the [FA Integrated Selection Tool] button.

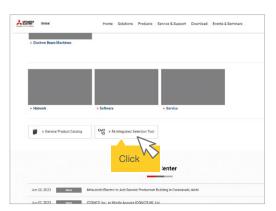


FAgoods terminal blocks and signal converters corresponding to the programmable controller that you have selected are displayed. Click on the applicable model and cable.

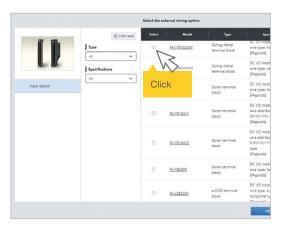


To select a device, select the MELSEC series, CPU module, base unit, power supply module, and modules in this order.

Click the added module, and click the [Select the external wiring option] button.

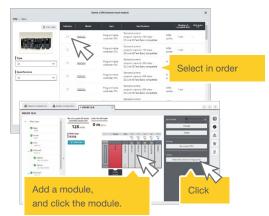

Click the "System configuration" icon in the upper right corner of the window to display the system configuration including the programmable controller selected.

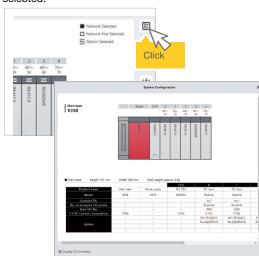

Remarks

Network interface modules can be selected from the selection of remote I/O devices.

^{*} For information on the selection of modules that can be installed, please check our website (MEEFAN).

Digital signal converter (terminal module)



FA1-TH4X24RA1L20S1E, etc.


Features of the digital signal converter (terminal module)

Digital signals from a programmable controller can be converted to signals suitable for the connected devices such as a magnetic starter (example: from 24VDC signal to 200VAC signal).

One terminal module supports connections with multiple devices with different voltage loads.



System optimization and time, wire saving

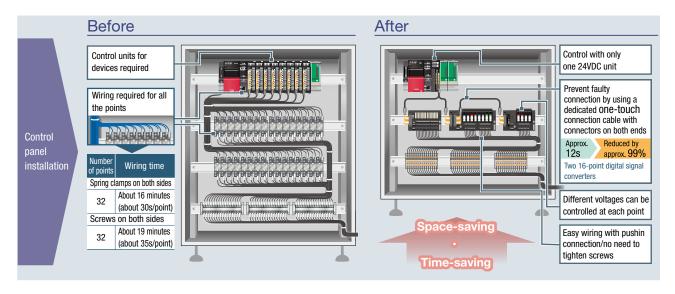

One digital signal converter (terminal module) can be used to connect input signals from devices with different voltages. This helps save space in the control panel. Wiring time and maintenance costs can also be reduced thanks to a dedicated cable and spring clamp terminal block.

Dispersed installation near devices

Optimum configuration using applicable combinations of devices

4 points in total	4-point			
8 points in total	8-point			
	4-point 4-point			
12 points in total	8-point 4-point			
	4-point 4-point 4-point			
	16-point			
16 points in total	8-point 8-point			
	8-point 4-point 4-point			
	4-point 4-point 4-point			

8-point and 4-point installation base units can be combined (max. 16 points).

Module lineup

Appearance	Туре		Lineup
5	Slim module	Input, output	N/O or N/C contact
_		Output	C/O contact Triac Transistor Signal pass-through
Acti	Functional module	Input	Relay isolation: 24VDC relay Photocoupler isolation: 24/48/100VDC, 100/200VAC Dummy

Slim module: Less space is required as the

terminal module is also compact.

Functional module: No dedicated tools are required for replacement. An LED is provided

on a module.

FA1-AT1B4X1TE, etc.


Features of the analog signal converter

Analog signals from the connected devices such as sensors can be converted to signals suitable for a programmable controller (example: from a temperature signal to a voltage signal).

Data from sensors can be visualized easily, and small-scale IIoT can be introduced



Visualization of various analog signals

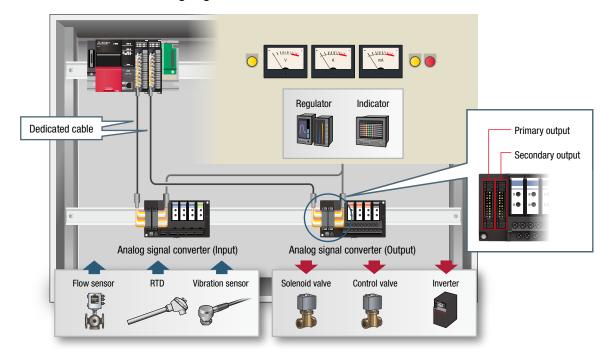

An optimal module can be mounted for each channel, and using the secondary output function enables easy wiring to devices such as regulators. Thus, data of the devices such as sensors can be easily visualized. In addition, the dedicated cables enable time and wire saving for connection of a programmable controller module.

Individual customization of conversion modules



Signal conversion modules can be selected individually for the sensor type. Modules can be easily replaced separately without a screwdriver.

Module lineup

Appearance	Туре	Lineup
FRAT	Input	Voltage Current Distributor RTD Thermocouple CT
FAST S O Z O	Output	Voltage Current
FAAT	Input/output	Signal pass-through Dummy (for dust protection)

Cable junction unit

FA1-MM20P/FA1-MM40P

Features of the cable junction unit


The cable junction unit greatly reduces cost and time required for transition wiring between control panels.

It solves problems and risks such as incorrect wiring, rewiring, and the need to wire one by one when connecting to external terminal receptacles for transition wiring between control panels.



Installation of the created control panel at the customer's site within a limited time

Before Problems and risks at the site

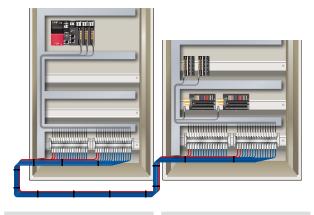


Wiring cables one by one

Re-wiring and re-connecting with the duct open

Risk of incorrect wiring Check required after wiring

Foreign matter entered when the door is open

After Solutions by using the cable junction unit

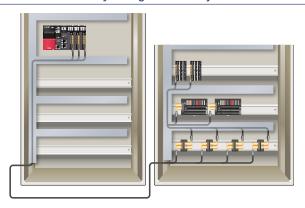

One-touch wiring connection between the programmable controller and the control panel reduces the man-hours.

The dedicated cable prevents incorrect wiring.

Operational improvement reduces the amount of time the door is left open.

Image of cable connection

	€ FAgoods					
Programmable controller	Dedicated cable					
	Programmable controller side connector	Junction unit side connector		Junction unit	Dedicated cable	Connectable module
MELSEC iQ-R/MELSEC iQ-F/ MELSEC-Q/MELSEC-F/ MELSEC-L series I/O module CC-Link Family I/O module	Spring clamp terminal block Screw terminal block FCN D-Sub Discrete cable MIL * For details, refer to our website. n	MIL40P		40P	Dual-ended MIL 40P connector (FA-CBL**MMH)	Junction terminal block
Non-Mitsubishi PLC I/O module • Anywire Corporation • OMRON Corporation • Yokogawa Electric Corporation • Fuji Electric FA Components & Systems Co., Ltd.		MIL20P	MIL20Px2 (Branch type)	20P	Dual-ended MIL 20P connector (FA-CBL**MMH20)	Digital signal converter* (terminal module)
	Overall cable length 20m				*: Can only be connected with a 20P junction unit.	

Network amplifier junction terminal block


DG2SV3TB

Features of the network amplifier junction terminal block

The network amplifier junction terminal block is used to relay the signals between the MR-J5-G, MR-J4-B, or MR-J4-GF and the external devices. When using multiple axes, transition wiring for interface power supplies is available 6A maximum.



Less wiring



- · Easy and reliable wiring connection with a servo amplifier using a dedicated cable
- No need for a screwdriver due to push-in connection


Dedicated cable for easy wiring, cost and time savings, and reliable quality



Using dedicated cables reduces cost and time for prior check of pin layout and wiring.

Easy wiring leads to control panel solutions.

Branch wiring for digital interface power supply

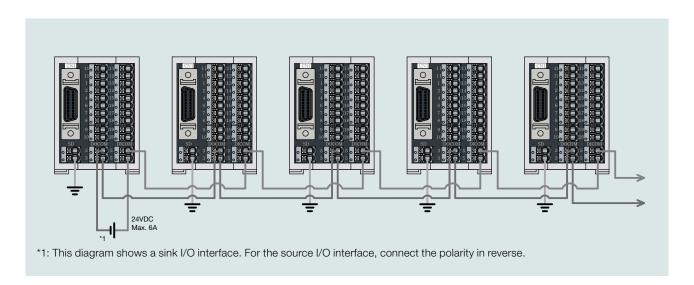

Up to 6A of servo amplifier digital interface power supply is possible to be branched. Target servo amplifier: MR-J5-G(-RJ), MR-J4-B(-RJ), MR-J4-GF(-RJ)

Network devices

CHAPTER 02

Introduction of small-scale IIoT to reform production sites

We provide products to be connected to industrial networks, which are necessary to rapidly-advancing introduction of IIoT in factories.

We support introduction of IIoT in factories by providing methods to use networks to visualize data and images and to link devices and machines, and providing contracted development of network devices.

Introduction of small-scale IIoT



Data from sensors and switches can be visualized by connecting digital signal converters (terminal modules) and analog signal converters to CC-Link family networks.

Network bridge



Controlling CC-Link devices on the CC-Link IE TSN side: The lineup for CC-Link IE TSN is complemented.

Gradually replacing CC-Link with CC-Link IE TSN: The existing devices, wiring, and data can be utilized.

Traceability



Using RF tags can associate data of history management with the related data and visualize the production operating ratio. Suitable devices can be selected from the extensive product lineup for the system.

Open network connection



FL-net(OPCN-2) system can be configured using MELSEC iQ-R series.

Easy control of hydraulic pressure with SSCNETIII/H



A hydraulic cylinder, which is not compatible with SSCNETIII/H, can be connected to SSCNETIII/H. Interpolation control and advanced control are also available.

Visualization of production sites using camera monitoring



Using this product with an HMI (GOT) enables checking images recorded by cameras, controlling camera shooting directions, or recording images when a downtime occurs.

Network interface module

FA3-AT1C8X, etc.

Features of the network interface modules

The interface module for signal converter easily connects analog signal converters and digital signal converters (terminal modules) to CC-Link family networks. Data is collected from devices, enabling small-scale IIoT.




Central control of data by small-scale IIoT




An analog signal converter connected to network digitalizes analog signals from devices such as flow/temperature sensors. Collected sensor data can be used to monitor the on-site operating conditions.

Saving cost and time for wiring in control panel and system

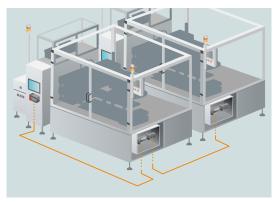


Devices can be easily installed at dispersed sites with network cables. Less wiring distances between devices reduce cost and time for wiring and cable routing.

Customization of output/conversion modules

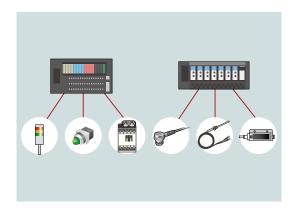



A digital signal converter (terminal module) and an analog signal converter can be customized according to application, as output modules and signal conversion modules can be combined separately.

Supporting prediction maintenance

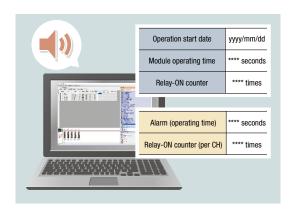

Temperature fluctuation and system operating conditions can be logged along the time axis. Prediction based on the logged data streamlines maintenance.

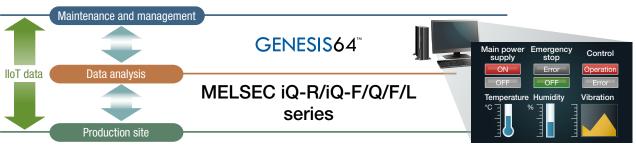

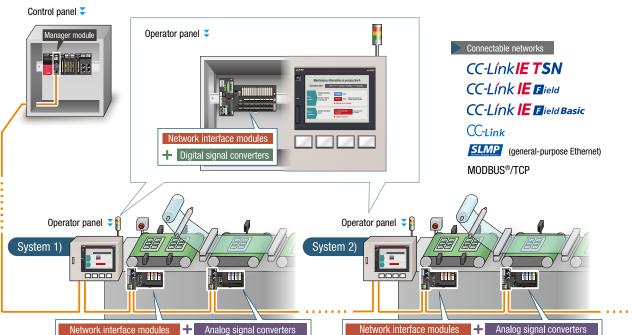

Slim control panel

One master module enables cable routing to devices and collects data from sensors.

Simple wiring

Devices and remote panels can be easily connected to the control panel with network cables.

Easy installation and inspection

Additional installation and inspection of devices can be performed independently from other systems, reducing working time and downtime.

Related products

		Supported network			
			CC-Link IE TSN CC-Link IE Field CC-Link IE Field Basic SLMP (general-purpose Ethernet) MODBUS/TCP	CC-Link IE TSN CC-Link IE Field CC-Link IE Field Basic SLMP (general-purpose Ethernet)	CC-Link
land to be	Innut (sink (source)	Connection cable included	FA3-TH1M16XC-01C	FA3-TH1T16XC-01C	FA3-TH1C16XC-01C
	Input (sink/source)	Connection cable not included	FA3-TH1M16XC	FA3-TH1T16XC	FA3-TH1C16XC
Digital signal converter	Output (sink)	Connection cable included	FA3-TH1M16Y-01C	FA3-TH1T16Y-01C	FA3-TH1C16Y-01C
(terminai module)		Connection cable not included	FA3-TH1M16Y	FA3-TH1T16Y	FA3-TH1C16Y
	Output (source)	Connection cable included	FA3-TH1M16YE-01C	FA3-TH1T16YE-01C	FA3-TH1C16YE-01C
		Connection cable not included	FA3-TH1M16YE	FA3-TH1T16YE	FA3-TH1C16YE
Analog signal converter	Input	Connection cable included	FA3-AT1M8X-01C	FA3-AT1T8X-01C	FA3-AT1C8X-01C
		Connection cable not included	FA3-AT1M8X	FA3-AT1T8X	FA3-AT1C8X
	Output	Connection cable included	FA3-AT1M8Y-01C	FA3-AT1T8Y-01C	FA3-AT1C8Y-01C
		Connection cable not included	FA3-AT1M8Y	FA3-AT1T8Y	FA3-AT1C8Y

CC-Link IE TSN - CC-Link Bridge Module


FA3-BR1TC

Features of the CC-Link IE TSN - CC-Link Bridge Module

The bridge module connects the devices that are not in the CC-Link IE TSN lineup. The CC-Link devices can be controlled from the CC-Link IE TSN devices.




Connect CC-Link devices to CC-Link IE TSN networks

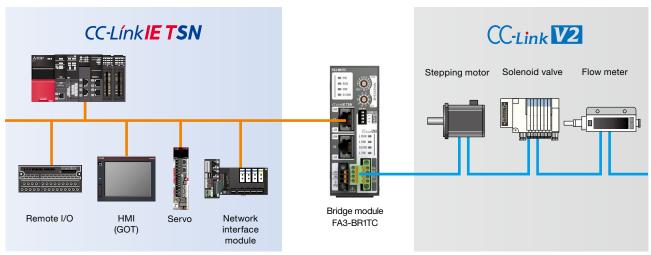


- CC-Link manager not required
- Control devices not in the CC-Link IE TSN lineup (Up to 64 CC-Link stations)
- The devices are CC-Link IE TSN Class B Ver. 2.0 compatible.


Upgrade to CC-Link IE TSN in stages

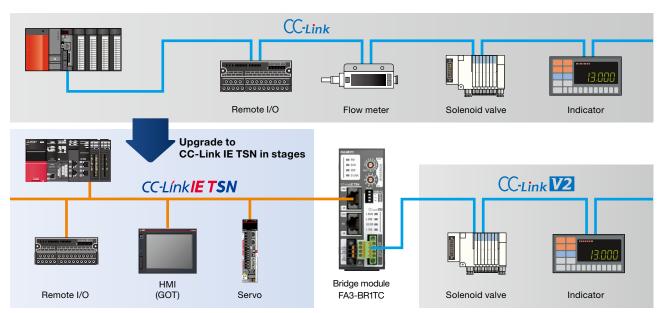


- Using existing devices and wiring helps to cut costs and reduce construction time.
- The amount of plastic materials is reduced by reusing existing CC-Link devices.
- Reuse old line or facility operation data for new lines/facilities.

Setup support

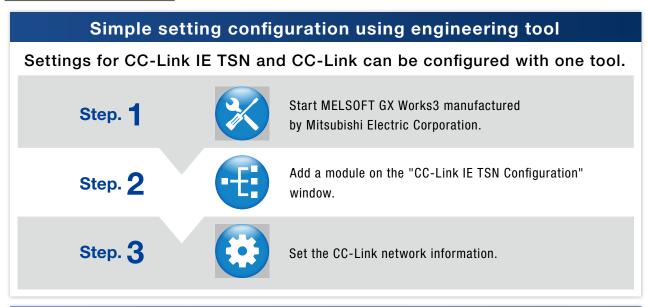

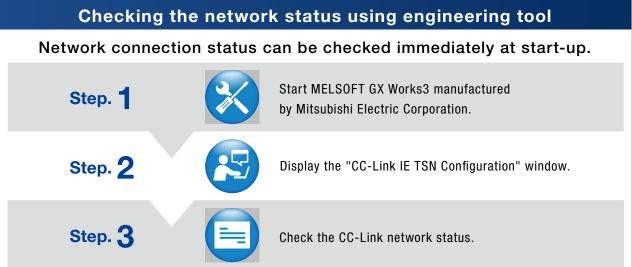

Data communication between CC-Link IE TSN and CC-Link

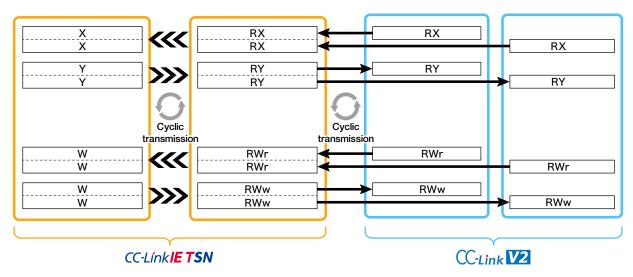

Both CC-Link word data and bit data can be read from and written to the CC-Link IE TSN manager station.

SSCNET-compatible hydraulic control unit

DG2AF3N, etc.

Features of the SSCNET-compatible hydraulic control unit

Positioning control or pressure control for hydraulic cylinder can be performed when the SSCNET-compatible hydraulic control unit is connected with a Motion controller or Simple Motion module through SSCNET III/H, Mitsubishi Electric servo system network.




Connectable models

Connectable products		
	Q173DSCPU	
Motion controller	Q172DSCPU	
	Q170MSCPU(-S1)	
	RD77MS□	
Simple Motion module	QD77MS□	
	LD77MS□	


For details on the connectable Motion controller operating systems and Simple Motion modules, refer to our website.

Hybrid drive

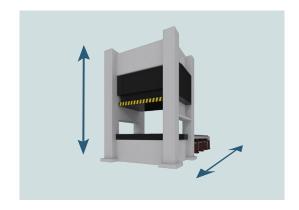


Interpolation control and synchronous control are available when a hydraulic cylinder and a servo motor are used.

Compatible position sensors

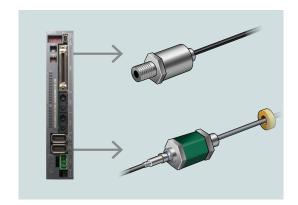


An analog input module (16-bit), a pulse encoder (A/B-phase), a Mitsubishi Electric serial encoder, and an SSI encoder can be used as a position sensor.

Pressure control without A/D converter module

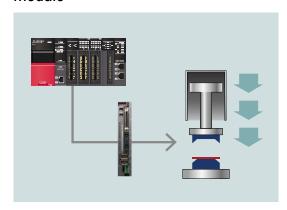

Pressure control is available with a Motion controller and a Simple Motion module.



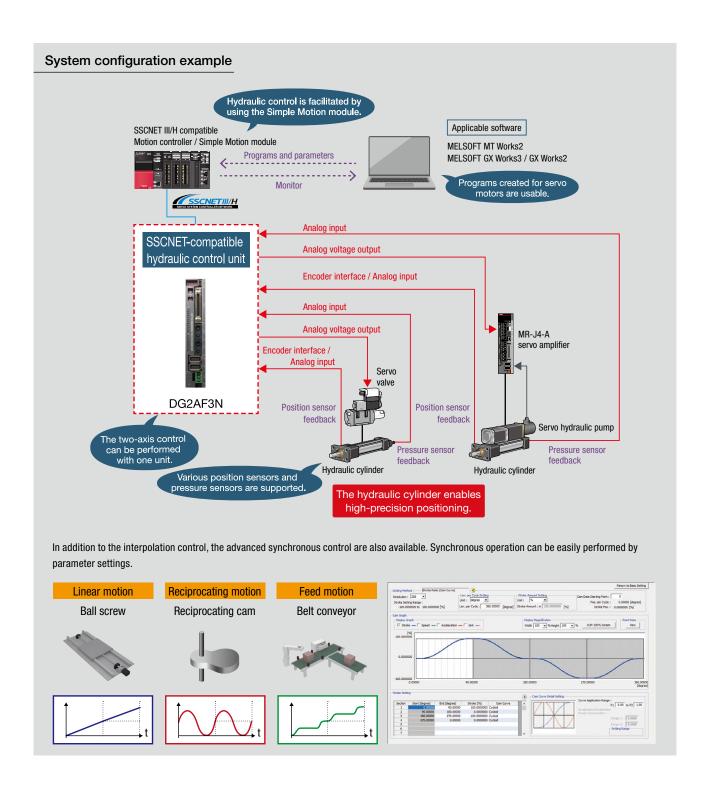

Related products

ltem	Model	Specifications	
SSCNET-compatible hydraulic control unit	DG2AF3N	Voltage analog input	
SSCIVET-COMPANDIE HYDRAUNG COMOU UNIT	DG2AF3N-P01	Current analog input	
Junction terminal block	DG2SV1TB	Our general-purpose interface amplifier junction terminal block (sink/source shared type, full signal) is available.	
One of the selection of	DG4AF3CB05	Length: 0.5m	
Connection cable for junction terminal block	DG4AF3CB10	Length: 1m	

Products for monitoring and traceability

CHAPTER 03

Visualization (monitoring and diagnosis) of production sites

The idea of smart factory is leading to a new era of manufacturing, in which data and information can be shared between production sites and offices.

Our products enable visualization (monitoring and diagnosis) and sharing of various data and information, including the operating condition of each process, current state of production sites, and data from sensors.

Monitoring and diagnosis




- "Writing commands for the production process" and "Reading data of the working process" using RF tags can be controlled together.
- Data is collected from sensors such as temperature sensors and flow sensors.




Cooperation with cameras enables display of images of the production site and a quick resolution of a downtime.



Factory

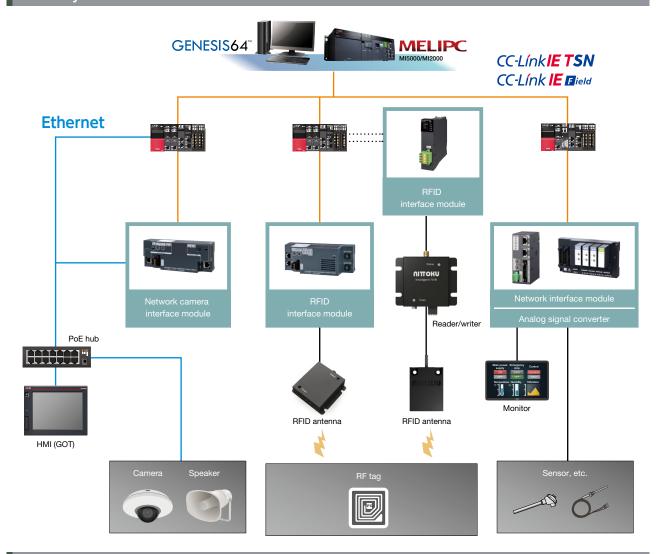

Building

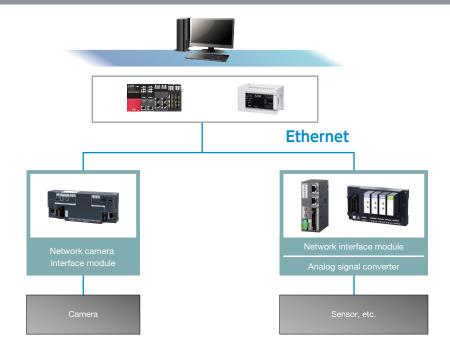

Network camera interface module

ECLEF-NV1G-04, etc.

Features of the Network camera interface module

The network camera interface module used with an HMI (GOT) enables checking images recorded by cameras, controlling camera shooting directions, or recording images when a downtime occurs.

This product can control network devices other than network cameras by using the Hypertext Transfer Protocol (Common Gateway Interface).





Displaying images

An operator can change camera shooting directions while checking images on the screen of the HMI (GOT).




Sending commands for recording

Commands to start or stop recording can be sent.



Switching between cameras

The monitored image can be switched to images recorded by other cameras.



Monitoring for trouble analysis

When a trouble occurs, the production status before and after the trouble occurrence can be recorded and used for the trouble analysis.




Large-scale split screen display

Images can be displayed on a split screen on the HMI (GOT) or a generalpurpose monitor.



Voice messages via a speaker

Error messages or the like are given by voice using a network speaker.

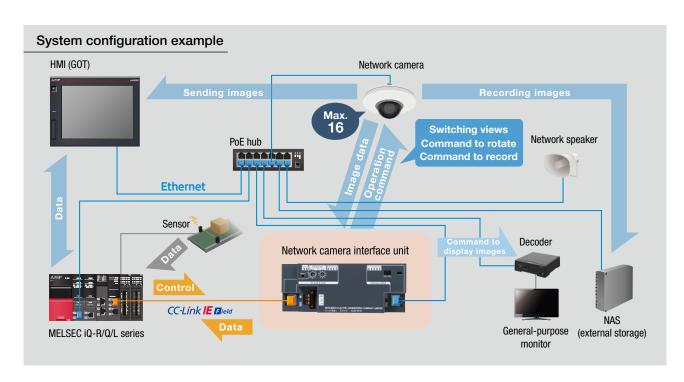




Application example

Temperature monitoring system


- The absolute temperature is obtained at a specified point within the shooting range. (The obtained temperature can be used as numerical value data.)
- Up to six temperature measuring ranges are set within the shooting range.
- The maximum temperature, minimum temperature, and average temperature are obtained for each temperature measuring range. (The obtained temperatures can be used as numerical value data).
- The MELSEC iQ-R/Q/L series can be notified of the alarms that the specified temperature or temperature change rate (°C/second) is exceeded.

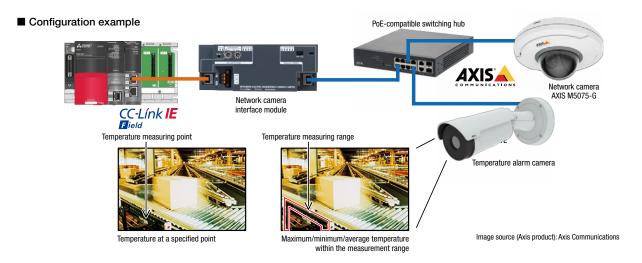

Application example

Reducing energy loss through an air conditioning duct by tracking human presence

By controlling the air conditioning duct with MELSEC and MELSERVO, air can always be distributed to points where human presence is detected, reducing energy loss and creating a comfortable space.

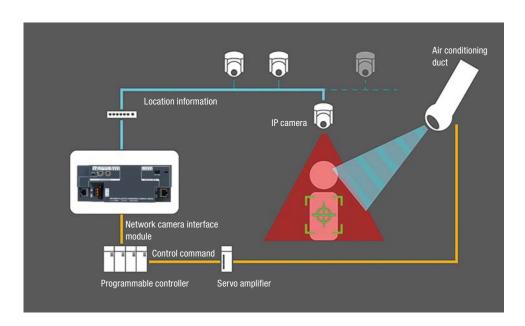



NITTOKU ITS-H series-connectable

MELSEC iQ-R series-compatible RFID interface module


ER-1CM1NT-01, etc.

The possibilities of RFID

Vital information can be collected and stored at various points on the production line as RF tags pass through the process along with the product. Reading RF tag information allows for traceability, real time monitoring, work instructions, and inventory management via an Andon system or tablet



Integrated information management from inventory to shipment

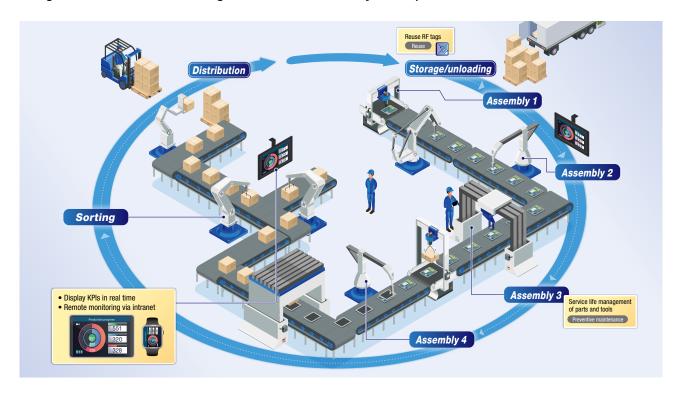

Comprehensively managing vital information such as various recipes and everything from inventory to shipment has become complicated.

An RFID system not only allows for information management by simply scanning items, but also facilitates problem resolution via digitalization.

Unlike barcodes, RFID tags can be reused, thus contributing to an increasing sustainable society.

Features



ISO compliant RF tags*

ISO 15693 compliant RF tags can be used regardless of the manufacturer.

Recommended product NITTOKU CO., LTD. RF tags *Refer to our technical bulletin for our product test.



Connect up to 4 units (per module)

Up to four reader/writers can be installed per module allowing for optimal module configuration and a reduction in spare parts.



600m distributed installation*1

NITTOKU RF tags have a range ten times*2 that of our existing product. This resolves range issues.


*1 The distance between the Mitsubishi Electric RFID interface module and the NITTOKU reader/writer. *2 Result of in-house testing



Large-capacity RF tags

8KB RF tags can be used when complex recipes need to be managed.



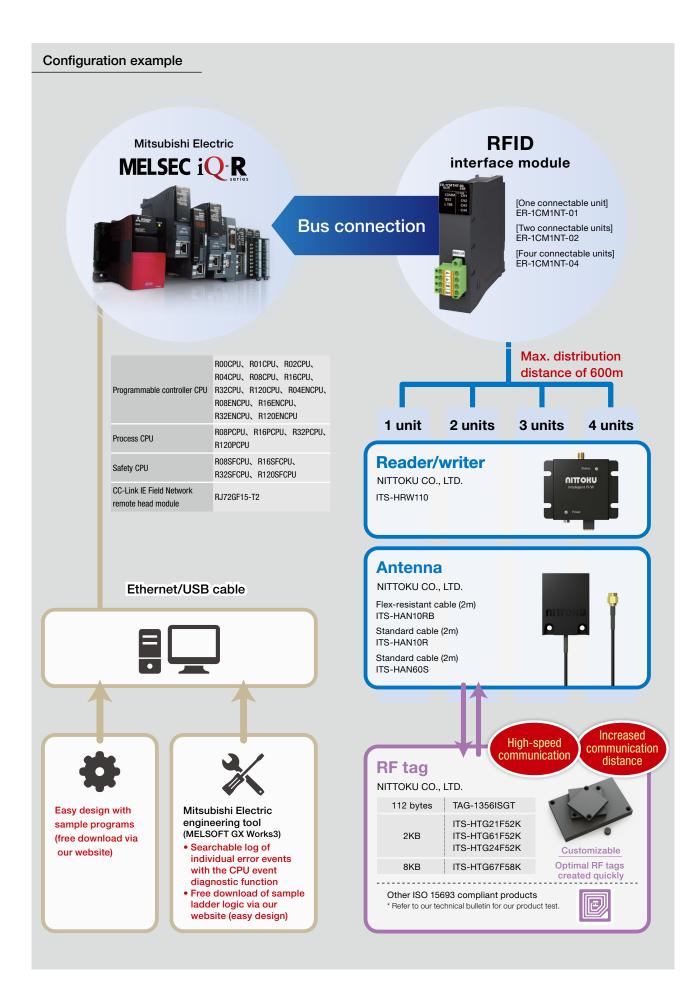

Upgrade tool products

CHAPTER 04

Upgrading system leading to smart factory

As operation in production lines must be stable, devices in the system should be replaced as required.

During replacement, a production line is stopped, resulting in production stop.

Replacement should be performed in as short time as possible.

Our products can minimize production line downtime.

To achieve sustainability



Our upgrade tool products require only a minimum of changes. The existing wiring and terminal blocks can be reused instead of being discarded, reducing the amount of plastic used.

e-F@ctory



IIoT greatly affects industries in the world.

Manufacturing needs to be optimized by introducing IIoT throughout factories to survive the fierce competition.

Programmable controllers, which enable such optimization, can be easily replaced in short time.

Easy system upgrading will contribute to your first step to next-generation manufacturing.

Preventive maintenance




Programmable controllers and servo system contribute to manufacturing.

When devices are used for a long period of time, production line downtime at a failure may be prolonged due to supply stop of spare parts or other reasons.

The existing devices can be replaced separately to make downtime shorter.

Easy replacement with the newest programmable controller


The existing programmable controller can be replaced easily by using upgrade tool products. Wiring with conversion adapters requires only two steps to disconnect the existing programmable controller and install a new programmable controller. Disconnecting and wiring all the cables, modifying cables, and checking wiring are not required. Therefore, the wiring work time can be reduced significantly.

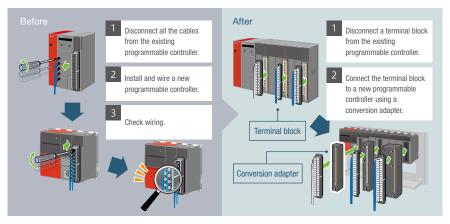

riepiaceable combinations				
Existing programmable controller	Replacing programmable controller			
Mitsubishi Electric MELSEC-A/AnS series	MELSEC iQ-R series			
	MELSEC-Q series			
	MELSEC-L series			
PLCs manufactured by OMRON*, YASKAWA,	MELSEC iQ-R series			
SHARP, or other manufacturers	MELSEC-Q series			

Replaceable combinations

Gradual replacement to CC-Link IE TSN

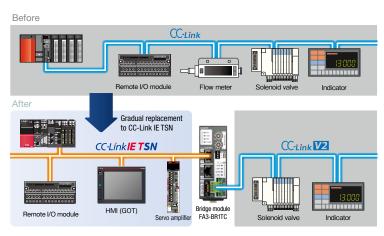

Although replacement to CC-Link IE TSN is planned to achieve an advanced smart factory, some required devices are not in the lineup.

- · For the devices that are not in the CC-Link IE TSN lineup, the existing CC-Link devices can be used.
- · Reusing devices reduces the amount of plastic
- · Operation data of the existing system can be utilized in the new system.

^{*} Program converter is available for replacing OMRON's PLCs.

Easy selection

The selection tool on our website helps replace Mitsubishi Electric programmable controllers.

New modules and the upgrade tool products are displayed by selecting the model names of the existing MELSEC series modules.


www.mitsubishielectricengineering.com/sales/fa/meefan/




From our website

(www.mitsubishielectricengineering.com/sales/fa/meefan/)

Select "Product Transition Selection Tool for Programmable Controllers " from the opening page of MEEFAN.

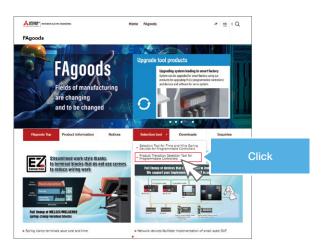


Olick the [Product Transition selection tool] button under "Startup method".

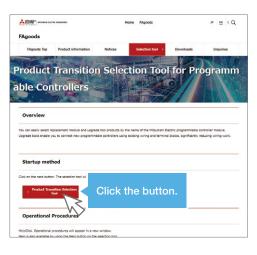


The product transition selection tool starts.

On the left of the window, select the model names of the existing MELSEC series modules from the drop-down lists.

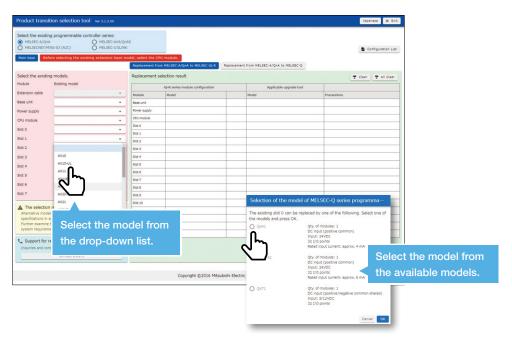

After the existing modules are selected as required, new MELSEC series modules and the conversion adapters are displayed.

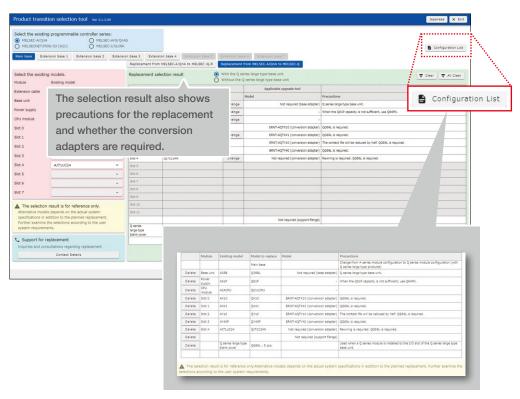

Products for system maintenance

CHAPTER 05

Stable operation for productivity improvement

Product line downtime sometimes occurs unexpectedly.


Taking measures contributes to safe operation.

Voice alerts



Voice alerts are given so that an operator away from the system can notice the alerts. Voice volume and language can be selected according to the operating environment.

No need for periodic screw retightening

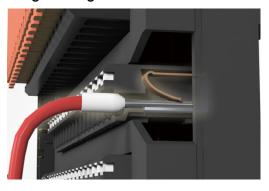


Spring clamp junction terminal block, which does not require screws, eliminates risk of screw-loosening due to vibration. Therefore, screw tightening during maintenance is not required, reducing work load of workers.

Facility status monitoring



Collecting information from sensors and visualizing the facility status reduce the workload of on-site workers.

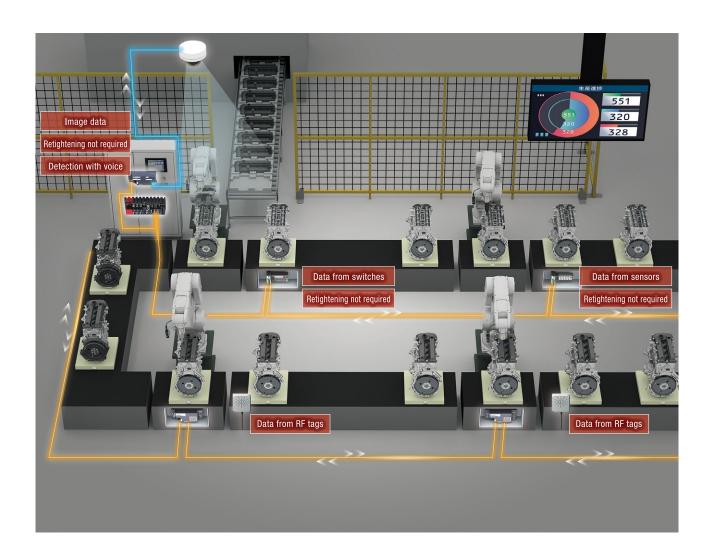

Preventive maintenance by managing the number of uses



Managing the number of uses of the lifeexpired parts by RFID and replacing the parts before the production line stops can reduce the risk of production line downtime.

Visualization of production sites using camera monitoring



Using this product with an HMI (GOT) enables checking images recorded by cameras, controlling camera shooting directions, or recording images when a downtime occurs.

For details, refer to page 24.


Panel mount HMI speaker

FA1-GT0S04W

Features of the HMI speaker

Important information in production sites can be accurately notified to an operator by using the sound output function of the HMI speaker.



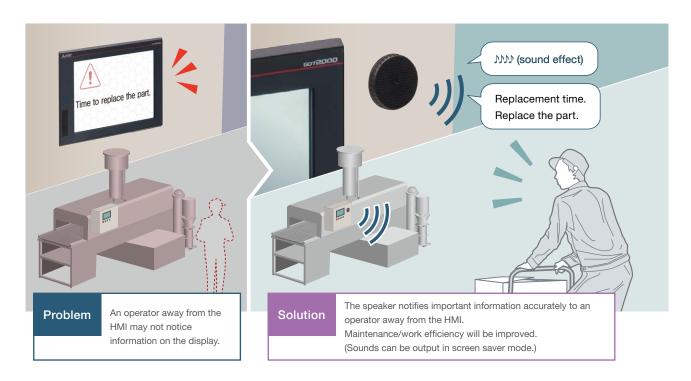


Various touch sounds

Touch sounds that match the worksite Operation starts. Operation stops. Touch sounds that match the operator's preference Touched on. Switch pressed.

Touch sounds can be changed depending on the worksite and operator's preference.

Incorrect operation prevention



When a touch switch is pressed, the next operation and precautions are voiced, which prevents incorrect operation.

Voice guidance



The announcement in multiple languages in order is available at a worksite where the operators speak in different languages.

Features of the spring clamp terminal block

The spring clamp terminal block does not require screws. Wires can be easily pushed into the conductive terminals without using a screwdriver.



Easy wiring



Wiring time can be significantly reduced by push-in connection.

* Calculated by comparing the time taken by non-experts with two years of experience (Data sourced from Japan Switchboard & control system Industries Association)

Stable connection



Screws are vibration resistant. Uniform quality is guaranteed for wiring since no special skills are required.

Less maintenance




Screw tightening during maintenance is not required, reducing work load of workers. Rewiring work is also facilitated by push-in connection.

Wiring of the spring clamp terminal block

When using ferrule terminals

Step.1



Strip the stranded wire sheath, and then insert the ferrule solderless terminal.

Step.2



Crimp the terminal with a dedicated tool.

Step.3



Wiring is completed by simply inserting the ferrule solderless terminal into a conductive terminal without using a screwdriver.



Facility status monitoring

Automation of facilities is essential to achieve "standardized work procedures" and "improved productivity". However, if the facility stops working, there will be a loss of time and production while the system is restored.

Understanding facility status is a step towards achieving an error-free production site.

Application examples

Parts production line: Labor saving for collecting information such as temperature, pressure, and flow rate from sensors

Problem

The entire number of sensors were visually inspected several times a day, and the condition of the production line was checked.

What you want to achieve

- Visualizing the sensor information that is being visually inspected, as a part of the visualization of the production line
- Using the sensor information for preventive maintenance by digitizing and storing it into the programmable controller to output an alarm

Point

- Dispersed installation via network connection allows installation of products near sensors, thereby easy maintenance.
- Analog signal converters can be selected individually according to the optimal configuration.
 By having unused points left, even if a sensor is added, it is only needed to install the module in the empty slot.






Solution by visualizing the machine status

Problem

- It is essential to visualize the operating status of each machine, but there is no idea of where to start.
- Major renovation work is difficult.

What you want to achieve


- Easily installing sensors to collect data
- Displaying sensor information in graphs to visualize the facility status
- In the future, using collected data to improve production efficiency and diagnose machine failures
- Point
- A single network cable is used for wiring and sensor data is collected to programmable controllers.
- External measurement data is used via a network, eliminating the need for machine modification.
- An applicable module can be selected for each sensor.
- Various networks, including CC-Link family networks and MODBUS/TCP network, are supported.

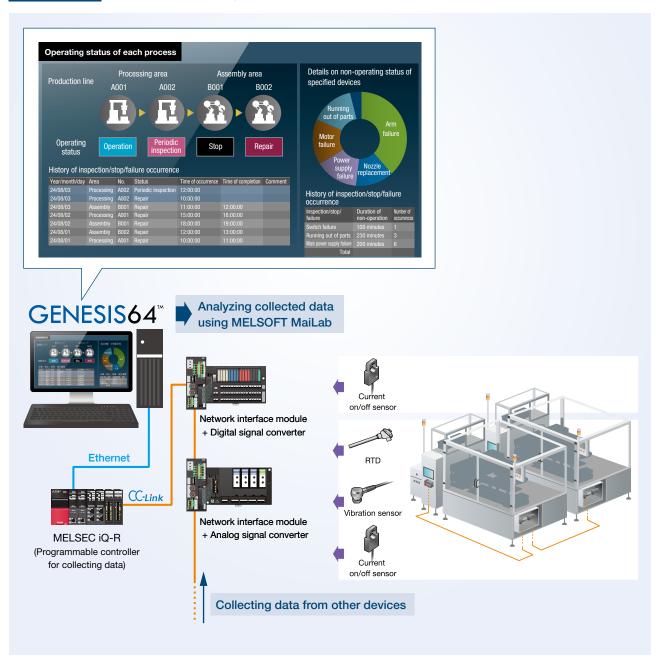

MEEFAN (FAgoods)

MEEFAN is the information web portal on which product information and technical information of our FAgoods products are provided and catalogs can be downloaded.

Selection tool which helps select the products from a wide lineup is also provided.

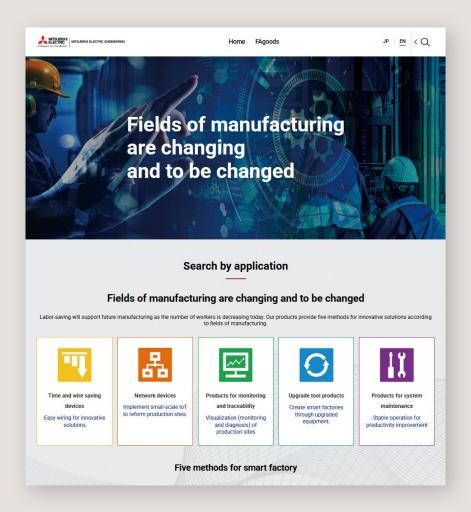

Home page of MEEFAN


Our products are introduced at the top of the homepage. As FA related products, for example, information on solutions to issues with devices and situations are provided.

Access




www.mitsubishielectricengineering.com/sales/fa/meefan/

contents

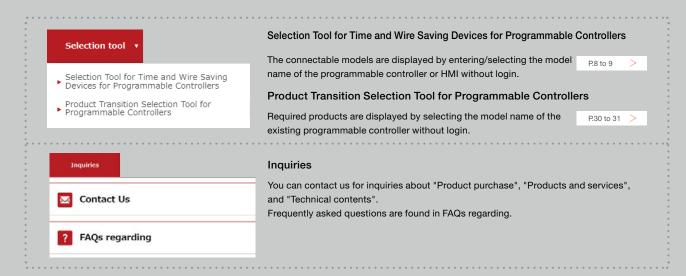

Five methods for smart factory

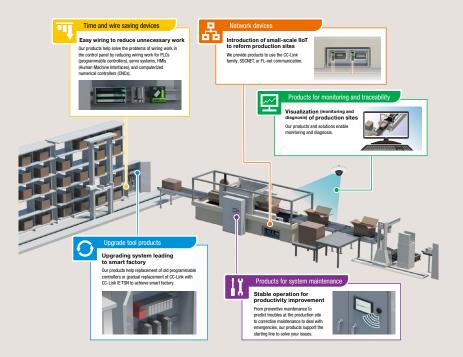

Five categories

Products are categorized into five groups. You can select a category and access product pages.


Product pages are also accessed from the model name search or the product list.



Display suitable for device

The website display size is automatically adjusted in accordance with the device such as a personal computer and a tablet including a smartphone.

contents

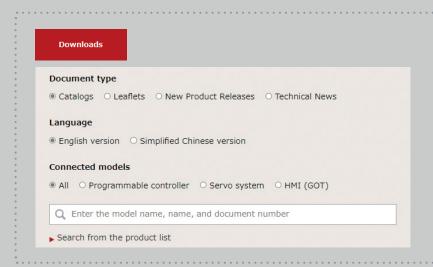

Downloads

The search can be narrowed down by selecting the document type, language, and connected models.

The search by entering a keyword is also available.

Related products

Leaflets

Network interface module



Digital signal converter



Analog signal converter



Spring clamp junction terminal block for Mitsubishi Electric AC servo system



SSCNET-compatible hydraulic control unit



CC-Link IE TSN - CC-Link Bridge Module



Catalogs

Digest edition



Time and wire saving devices



Network devices



Upgrade tool products



Modbus is a registered trademark of Schneider Electric USA Inc.

The company names and product names mentioned in this document are either registered trademarks or trademarks of their respective companies. In some cases, trademark symbols such as 'TM' or '®' are not specified in this document.

MITSUBISHI ELECTRIC ENGINEERING COMPANY LIMITED

NAGOYA ENGINEERING OFFICE | 1-9, Daiko-Minami, 1-Chome, Higashi-ku, Nagoya, Aichi 461-0047 Japan

www.mitsubishielectricengineering.com/sales/fa/meefan/ >



Precautions for Choosing the Products

Mitsubishi Electric Engineering will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric Engineering; opportunity losses or lost profits caused by faults in the Mitsubishi Electric Engineering products; damage, secondary damage, accident compensation caused by special factors unpredictable by Mitsubishi Electric Engineering; damages to products other than Mitsubishi Electric Engineering products; and to other duties

For safe use

- To use the products given in this publication properly, always read the relevant manuals before beginning

- The products have been manufactured as general-purpose parts for general industries, and are not designed or manufactured to be incorporated in a device or system used in purposes related to human life.
 Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger-carrying vehicles, consult with Mitsubishi Electric Engineering.
 The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.