

Configuration diagram

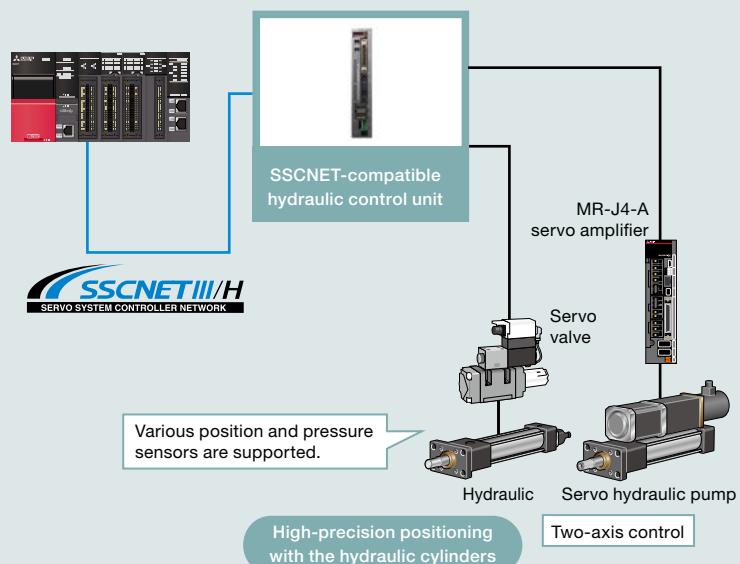


Hydraulic control

Easy synchronous operation of hydraulic cylinders using the SSCNET-compatible hydraulic control unit

Network distributed type

Refer to P.42. >

**Open network connection**

Connection with non-Mitsubishi PLCs and robots through FL-net (OPCN-2)

Slot-in type

Refer to P.48. >

